

# TH 9844 1" VIDICON

# with integral focusing coil and deflecting yokes

## Compact and lightweight:

Length

: 100 mm

Diameter :

37 mm

Weight

: 190 g

#### Rugged structure.

Focusing coil and deflecting yokes permanently assembled to the tube.

No need for beam alignment.

High resolution.

Low lag.



The TH 9844 is composed of a short (100 mm), sturdy 1" vidicon and an associated focusing-coil and deflecting-yokes assembly, matched to the camera tube.

The TH 9844, easy to install and to operate, is designed for compact, ruggedized TV cameras featuring high resolution and good uniformity of the video output signal.

Its performance is optimized by factory adjustment of the tube and the associated components, which are permanently attached to the tube.

The printed-circuit, low-impedance yokes also yield good deflection linearity and make the TH 9844 suitable for use in professional or miliraty TV cameras requiring high image quality and good reliability.

The TH 9844 can be optionally provided with a soldered target lead, potted base and connection leads, depending on the specific application.

# **GENERAL CHARACTERISTICS**

#### **Electrical**

- TUBE

Cathode	ated, oxide coated
- voltage	6.3 V
- current at 6.3 V	0. 10 A ± 10 %
Minimum preheating time	60 s
Output capacitance (target to all other electrodes)	
Focusing method	Electromagnetic
Deflecting method	



- FOCUSING COIL - DEFLECTING YOKES		
Focusing coil:	•	
- resistance	70 ± 7	Ω
- resistance	12 ± 4	Ω
- self-inductance	360 ± 30	μН
- resistance	12 ± 4	Ω
- self-inductance	350 ± 30	μΗ
Optical		
Target :		
- maximum useful diameter (format 4 x 3)	17 12. 7 x 9. 5 See F	mm mm igure 1
Mechanical	404.0	
	101. 6 37.0 C 15 (JEDEC No.	
Socket (Note 1)		92138 Any 190 g
OPERATING CONDITIONS  (All potentials are referred to grounded cathode)  Maximum Ratings (absolute values)		
-	+ 70	°c
Operating and storage temperature	40	°C
- VIDICON		
Target voltage	125	٧
Electrode g4 voltage (field)	750	V
Electrode g3 voltage (wall)	750 350	V V
Electrode g2 voltage (acceleration)	350	V
- negative bias value	150	V
- positive bias value	0	V
Cathode k voltage	0 6. 6	V
Heater voltage	6	v
Peak heater-to-cathode voltage:	125	V
<ul> <li>heater negative with respect to cathode</li> <li>heater positive with respect to cathode</li> <li></li> </ul>	10	v
Dark current,	0, 20	μA
Peak target current (Note 2)	0. 60	μΑ
Faceplate illumination	10.000	lux
	10 000	iux
- COIL AND YOKES	10 000	iux
	250	V
- COIL AND YOKES  Voltages between coils	250 250	
- COIL AND YOKES  Voltages between coils	250 250 300	V V mA
- COIL AND YOKES  Voltages between coils	250 250	V

# **Operational Conditions**

- VIDICON		
Faceplate temperature (Note 3)	25	°C
Image dimensions on target	12. 7 x 9. 5	mm
Scanning standard	s/second, 625 interlac	ed lines
Electrode g4 voltage	420	V
Electrode g3 voltage,	290	V
Electrode g2 voltage	300 45	V V
Electrode g1 voltage (for picture cutoff) (Note 4) max. min.	- 45 - 110	v
Minimum peak blanking voltage :	110	•
- applied to g1	<b>–75</b>	V
- applied to cathode	+ 20	V
Average gamma for target illumination between 1 and 100 lux (Note 5)	0.65	=
Limiting resolution at center of image (Note 6 - Figure 3)		ΓV lines
Limiting resolution at corners of image (without dynamic focus)	60	ΓV lines %
Image distortion	1	%
mage distortion		
- COIL AND YOKES		
Current in the focusing coil	110 ± 10	mΑ
Peak-to-peak current in deflecting yokes :	,	
- horizontal deflection	290 ± 30	mA
- vertical deflection	220 ± 20	mA
Typical Performance		
Typical Lettormance		
1-HIGH LIGHT LEVEL OPERATION		
(Faceplate illumination = 100 lux)		
Dark current i <sub>0</sub>	5	nΑ
Target voltage for i <sub>O</sub> = 5 nA (Note 8 - Figure 4)	_	V
Faceplate illumination (2854 °K) (Note 9)		lux
Signal current	300	nΑ
Lag : (Note 10 - Figure 5) :		
- maximum		% %
- average	10	/0
2 - AVERAGE SENSITIVITY OPERATION		
(Faceplate illumination = 10 lux)		
	20	- ^
Dark current i <sub>0</sub>		nA V
Faceplate illumination (2854 °K) (Note 9)		lux
Signal current		nΑ
Corresponding sensitivity	170	$\mu$ A/lm
Target illumination for 100 nA signal current	3	lux
Lag : (Note 10 - Figure 5)	20	%
- maximum		%
average		
3 - HIGH SENSITIVITY OPERATION		
(Faceplate illumination = $5 lux$ )		
Dark current io	50	пA
Target voltage for i <sub>O</sub> = 50 nA (Note 8 - Figure 4)		V
Faceplate illumination (2854 °K) (Note 9)	. 5	lux
Signal current		nA
Corresponding sensitivity		μΑ/Im lux
Target illumination for 100 nA signal current	1. 5	iux
maximum	. 20	%
- average		%



#### 4 - VERY HIGH SENSITIVITY OPERATION

(Faceplate illumination = 1 lux)

Dark current i <sub>O</sub>	100 30 to 70	nA V
Faceplate illumination (2854 °K) (Note 9)	1	lux
Signal current	100	nΑ
Corresponding sensitivity	800	$\mu$ A/Im
Target illumination for 50 nA signal current	0. 3	lux
Lag : (Note 10 - Figure 5)		
- maximum	20	%
- average	17	%

#### SPURIOUS-SIGNAL TEST

#### **Measurement Conditions**


 $Dark current i_0 = 20 nA$ 

Signal current i<sub>s</sub> = 200 nA

The tube is adjusted to provide maximum image resolution.

The gain of the video amplifier and the monitor are adjusted to obtain the best image (Note 11).

The test is performed using a uniformly diffused white test pattern that shows two zones, as indicated in the following drawing.



Zone 1: area inside the circle inscribed in the raster height, H.

Zone 2 : peripheral area.

#### **Spots**

Both black and white spots are counted, but actually considered as defects are only those spots having a contrast  $C \ge 50$  %, in light or in darkness.

The contrast is defined as  $C = 100 \times \frac{i_s b}{i_s}$  %,

where :  $i_{sb}$  = increment in video current due to the spot,

is = normal signal current.

D/H* ratio (%)	Allowed spots			
* D : average diameter spot H : raster height	Zone 1	Zone 1 + Zone 2		
		a	a + b	a + b + c
a : 0.8 < D/H ≤ 1	0	1	3	
b : 0.6 < D/H ≤ 0.8	1		3	6
c : 0.2 < D/H ≤ 0.6	3			Ů.

Any numbers of spots having D/H up to and including 0. 2 % are allowed unless concentration causes a smudged appearance.

Do not count spots of contrast C < 50 %.

#### Other Defects

Smudges, streaks, mottled or grainy background (black and white) are not considered as defects if their contrast is  $C \le 15 \%$ .

#### NOTES

- 1 THOMSON-CSF DTE, 38, rue Vauthier 92100 BOULOGNE-BILLANCOURT Tel. 604 81 75.
- 2 The target current is the total current drawn in the load resistance connected to the target: signal current + dark current; the dark current is the component existing when the illumination is removed.
  The video amplifiers must be designed to handle a peak target current of 1 µA in order to avoid amplifier overload or image distortions.
- 3 All characteristics are given for a faceplate temperature of 25 °C, the recommended temperature range being 20 °C to 30 °C. The rise of the faceplate temperature is determined by the ambient temperature and by the thermal dissipation of surrounding components.
- 4 Without blanking pulses applied to grid g1.
- 5 Average gamma is defined as the slope of the rectilinear part of the light transfer characteristics in logarithmic coordinates.
- 6 Practically, the limiting resolution corresponds to the resolution measured with a twin-bar test card at 5 % amplitude response.
- 7 In 625-lines CCIR Standard, line duration being 52 µs (line suppression period not included), 400 TV lines correspond to 5 MHz.
- 8 Indicated range of each type of service serves only to illustrate the operating target voltage range normally encountered. The target voltage for each vidicon must be adjusted to that value which gives the designed operating dark current.
- 9 All the above-mentioned illuminations assume a 2854  $^{\circ}$ K incandescent tungsten source.
- 10 The lag is defined as the percentage of the residual signal (measured 60 milliseconds after light excitation removal) to the initial current. This value assumes 50 frames/second scanning rate.
- 11 The monitor is adjusted as follows:


and of the tube itself.

- for the pedestal level (black), the luminance of the screen is set at cutoff.
- for the maximum level (white), the gain of the monitor is adjusted to obtain an optimum image depending on image content and ambient light.

Figure 1

### TYPICAL SPECTRAL SENSITIVITY CHARACTERISTICS

For equal values of signal current at all wavelengths
(0.2 µA signal current and 0.02 µA dark current
for scanned area of 12 7 mm x 9 5 mm)




WAVELENGTH ( nm )

Figure 2

#### LIGHT TRANSFER CHARACTERISTICS

Illumination uniform over photoconductive layer-scanned area 12.7mm x 9.5mm - face plate temperature 25°C



Illumination in lux and foot candles



Figure 3

MODULATION TRANSFER FUNCTION


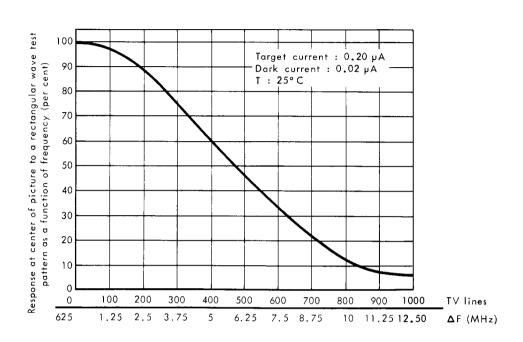


Figure 4

RANGE OF DARK CURRENT

Scanned area of photoconductive layer 12.7mm x 9.5mm

Target voltage ( V )



TYPICAL PERSISTENCE CHARACTERISTICS

Initial highlight signal current of 0.2 µA, scanned area of photoconductive layer 12.7 mm x 9.5 mm

100

io = dark current

T = 25° C

40

io = 0.02

100


200

300

400

Figure 5

### **OUTLINE DRAWING**

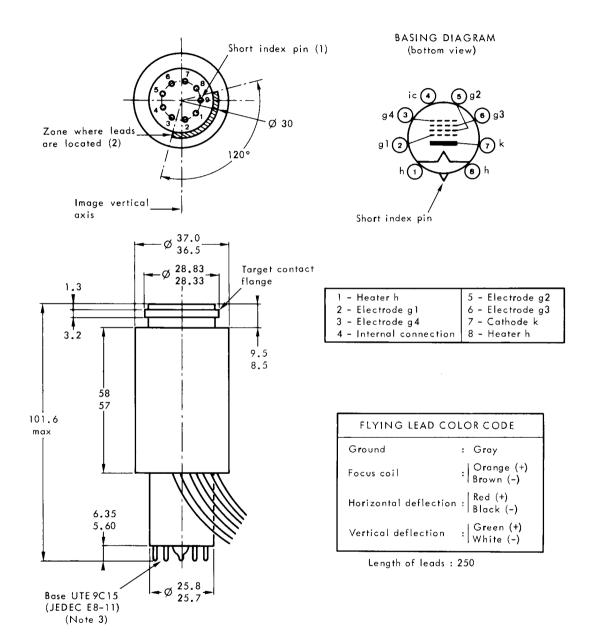

- The orientation of the index pin may be in any position with respect to the image axes.
- (2) The location of this zone may be in any position with respect to the image axes.
- (3) The base complies with JEDEC standard except for pin length.

Dimensions in mm, nominal unless otherwise indicated



