

Dual Triode

With Medium-Mu Unit and Low-Mu Unit

NEONOVAL TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathodes:

Voltage (AC or DC)	6.3 ± 10%	volts
Current at 6.3 volts	0.9	amp

Direct Interelectrode Capacitances (Approx.):^a

	Unit No.1	Unit No.2	
Grid to plate	4.2	9	μμf
Grid to cathode and heater. . .	2.2	7	μμf
Plate to cathode and heater . .	0.4	1.2	μμf


Characteristics, Class A₁ Amplifier:

	Unit No.1	Unit No.2	
Plate Voltage	250	150	volts
Grid Voltage.	-11	-17.5	volts
Amplification Factor.	17.5	6	
Plate Resistance (Approx.). . . .	8750	800	ohms
Transconductance.	2000	7500	μmhos
Plate Current	5.5	45	ma
Plate Current for plate volts = 60 and grid volts = 0	-	95	ma
Plate Current for grid volts = -25	-	8	ma
Grid Voltage (Approx.) for plate μa = 10	-20	-	volts
Grid Voltage (Approx.) for plate μa = 100.	-	-40	volts

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2.93"
Maximum Seated Length	2.62"
Length, Base Seat to Bulb Top (Excluding tip)	2.07" to 2.31"
Diameter.	1.062" to 1.188"
Bulb.	T9
Base.	Large-Button Neonoval 9-Pin (JEDEC No.E9-68)
Basing Designation for BOTTOM VIEW.	9HF

- Pin 1 - Plate of Unit No.2
- Pin 2 - Grid of Unit No.2
- Pin 3 - Grid of Unit No.2
- Pin 4 - Heater
- Pin 5 - Heater



- Pin 6 - Plate of Unit No.1
- Pin 7 - Grid of Unit No.1
- Pin 8 - Cathode of Unit No.1
- Pin 9 - Cathode of Unit No.2



VERTICAL-DEFLECTION OSCILLATOR

Values are for Unit No.1

Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^b

DC PLATE VOLTAGE.	330 max.	volts
PEAK NEGATIVE-PULSE GRID VOLTAGE.	400 max.	volts
CATHODE CURRENT:		
Peak.	77 max.	ma
Average	22 max.	ma
PLATE DISSIPATION	1.5 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode.	200 max.	volts
Heater positive with respect to cathode.	200 ^c max.	volts

Maximum Circuit Values:

Grid-Circuit Resistance:

For grid-resistor-bias or cathode-bias operation. 2.2 max. megohms

VERTICAL-DEFLECTION AMPLIFIER

Values are for Unit No.2

Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^b

DC PLATE VOLTAGE.	330 max.	volts
PEAK POSITIVE-PULSE PLATE VOLTAGE ^d	1500 max.	volts
PEAK NEGATIVE-PULSE GRID VOLTAGE.	250 max.	volts
CATHODE CURRENT:		
Peak.	175 max.	ma
Average	50 max.	ma
PLATE DISSIPATION	10 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode.	200 max.	volts
Heater positive with respect to cathode.	200 ^c max.	volts

Maximum Circuit Values:

Grid-Circuit Resistance:

For grid-resistor-bias or cathode-bias operation. 2.2 max. megohms


^a Without external shield.

^b As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission.

^c The dc component must not exceed 100 volts.

^d This rating is applicable where the duration of the voltage pulse does not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.



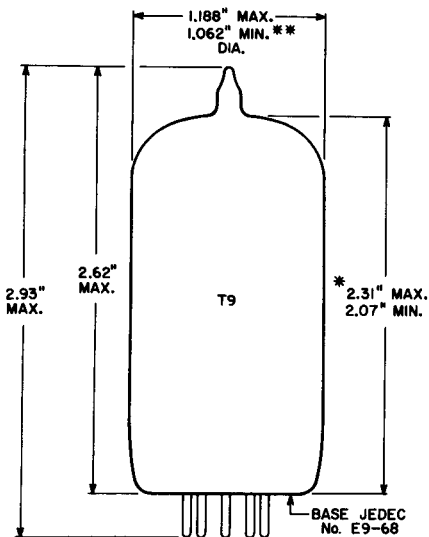

92CS-11115RI


* MEASURED FROM BASE SEAT TO BULB-TOP LINE AS DETERMINED BY A RING GAUGE OF 0.600" INTERNAL DIAMETER.

** APPLIES IN ZONE STARTING 0.375" FROM BASE SEAT.



6EW7


AVERAGE PLATE CHARACTERISTICS Unit No.1

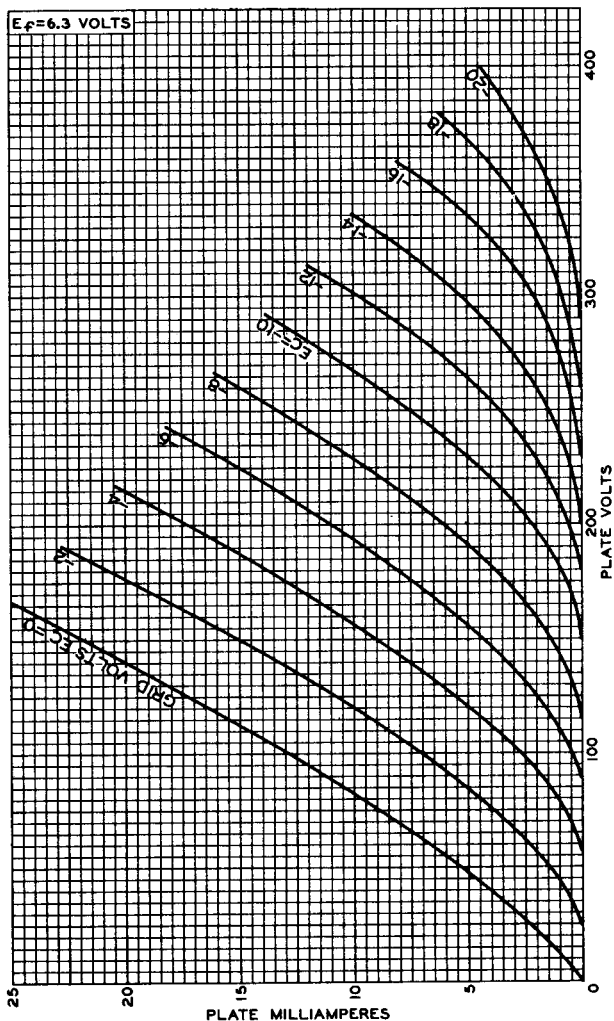

92CM-9988



AVERAGE CHARACTERISTICS Unit No.1

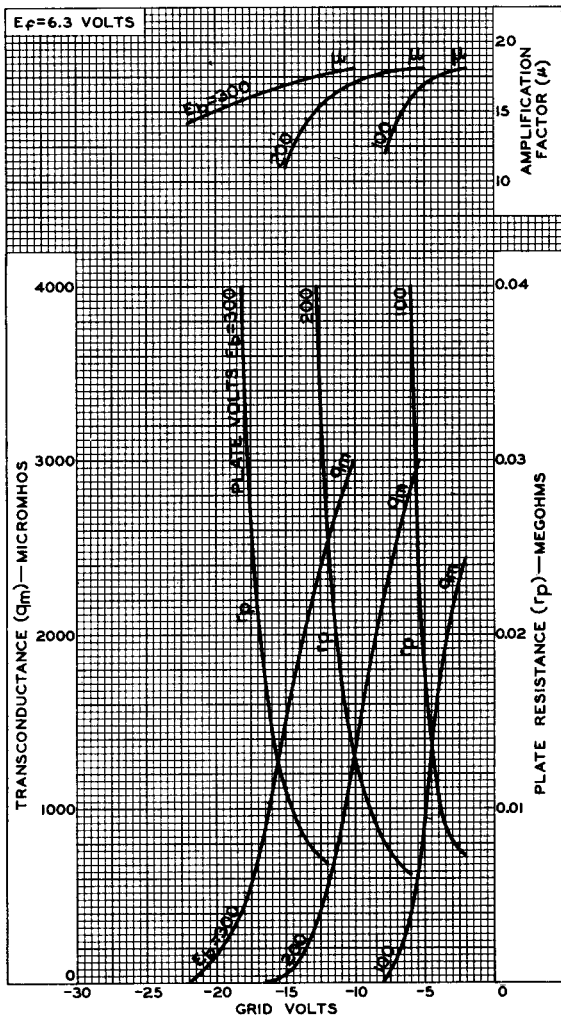


92CM-9991



6EW7


AVERAGE PLATE CHARACTERISTICS Unit No.2

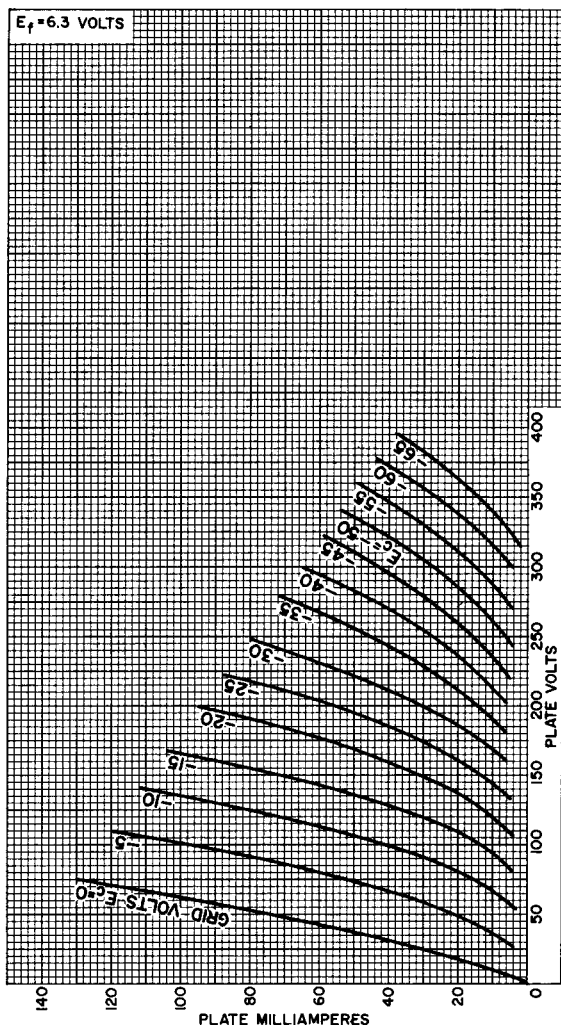

92CM-11111



AVERAGE CHARACTERISTICS Unit No.2

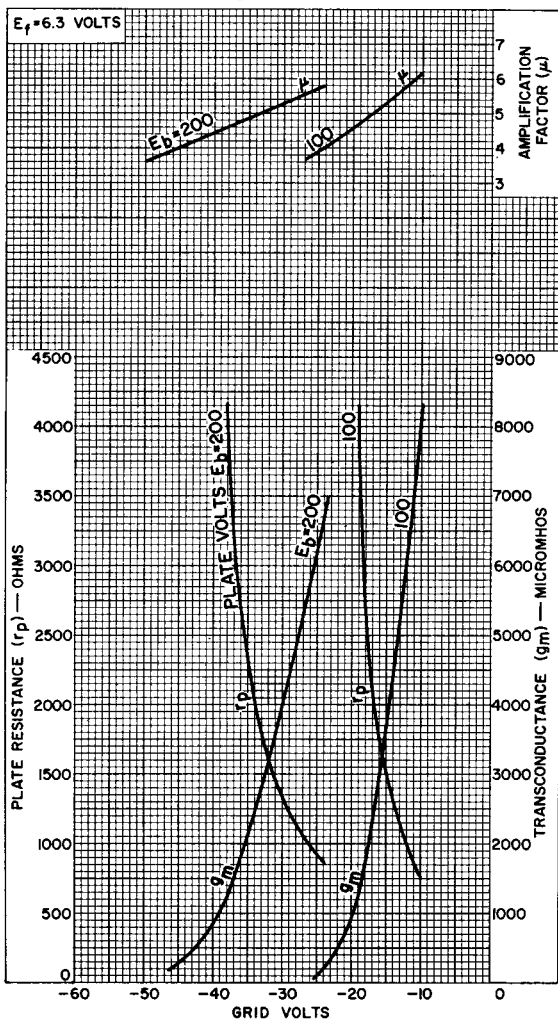

92CM-11113

