

## High-Mu Triode-Beam Power Tube

## NOVAR TYPE

For Combined Vertical-Deflection Oscillator and Amplifier  
Service in Color TV Receivers

## ELECTRICAL CHARACTERISTICS

## Bogey Values

Heater Current . . . . .	$I_f$	450	mA
Heater Voltage (AC or DC) at $I_f = 450$ mA . . . . .	$E_f$	21.0	V
Heater Warm-up Time (Average). . . . .		11	s

## Direct Interelectrode Capacitances (Approx.)

Without external shield

## Triode Unit:


Grid to plate. . . . .	$C_{gp}$	6.0	pF
Input: $G_T$ to (KT, H). . . . .	$C_i$	6.5	pF
Output: $P_T$ to (KT, H). . . . .	$C_o$	1.6	pF

## Beam Power Unit:

Grid No.1 to plate . . . . .	$C_{gp}$	0.7 max	pF
$G_{1B}$ to (KB + $G_{3B}$ , $G_{2B}$ , H). . . . .	$C_i$	16.0	pF
$P_B$ to (KB + $G_{3B}$ , $G_{2B}$ , H). . . . .	$C_o$	9.0	pF
$G_{1B}$ to $P_T$ . . . . .		0.12 max	pF
$P_B$ to $P_T$ . . . . .		0.32 max	pF

Basing Designation for BOTTOM VIEW . . . . . 9QT

- Pin 1 - Triode Cathode  
Pin 2 - Beam Power Grid No.1  
Pin 3 - Beam Power Cathode &  
Grid No.3  
Pin 4 - Heater  
Pin 5 - Heater  
Pin 6 - Beam Power Plate  
Pin 7 - Beam Power Grid No.2  
Pin 8 - Triode Plate  
Pin 9 - Triode Grid

CLASS A<sub>1</sub> AMPLIFIER

For the following characteristics, see Conditions

		Triode Unit	Beam Power Unit	
Amplification Factor	$\mu$	58	-	6.5 <sup>a</sup>
Plate Resistance (Approx.) . . . . .	$r_p$	16000	-	12000 -
Transconductance . . . . .	$g_m$	3600	-	9300 -
DC Plate Current . . . . .	$I_b$	2.3	200 <sup>b</sup>	56 -
DC Grid-No.2 Current . . . . .	$I_g$	-	20 <sup>b</sup>	3 -
Cutoff DC Grid-No.1 Voltage				
$I_b = 10$ $\mu$ A. . . . .	$E_c(\text{co})$	-6.6	-	-
$I_b = 1$ mA (Approx.) . . . . .	$E_c(\text{co})$	-	-	-26 -
$I_b = 100$ $\mu$ A . . . . .	$E_c(\text{co})$	-	-	-30 -



## Conditions

		Triode Unit		Beam Power Unit	
Heater Voltage . . . . .	$E_f$	21.0	21.0	21.0	21.0 V
Plate Voltage. . . . .	$E_b$	250	45	135	120 V
Grid-No.2 Voltage. . . . .	$E_c$	-	125	120	120 V
Grid-No.1 Voltage. . . . .	$E_c$	-4	0	-10	-10 V

## MECHANICAL CHARACTERISTICS

Operating Position . . . . .	Any
Type of Cathodes . . . . .	Coated Unipotential
Maximum Overall Length ( $l_m$ ). . . . .	3.710 in
Maximum Seated Length ( $l_m$ ). . . . .	3.330 in
Length, Base Seat to Bulb Top (Excluding tip) . . . . .	2.810 to 2.990 in
Diameter ( $d$ ) . . . . .	1.438 to 1.562 in
Envelope . . . . .	T12
Bases (alternates)	
Small-Button Novar 9-Pin (JEDEC No.E9-76)	
Small-Button Novar 9-Pin with Exhaust Tip 9-Pin (JEDEC No.E9-88)	

## VERTICAL-DEFLECTION OSCILLATOR (Triode Unit)

## Maximum Ratings, Design-Maximum Values

For operation in a 525-line, 30-frame system

DC Plate Voltage . . . . .	$E_b$	400 V
Peak Negative-Pulse Grid Voltage . . . . .	$e_{cm}$	400 V
Peak Cathode Current . . . . .	$i_{km}$	105 mA
Average Cathode Current. . . . .	$I_k(av)$	30 mA
Plate Dissipation. . . . .	$P_b$	2.5 W
Peak Power Output. . . . .	$P_o$	2.5 W

## Maximum Circuit Values

Grid-Circuit Resistance	$R_g(ckt)$	
For grid-resistor-bias operation . . . . .		2.2 M $\Omega$

## VERTICAL-DEFLECTION AMPLIFIER (Beam Power Unit)

## Maximum Ratings, Design-Maximum Values

For operation in a 525-line, 30-frame system

DC Plate Voltage . . . . .	$E_b$	400 V
Peak Positive-Pulse Plate Voltage <sup>c</sup> . . . . .	$e_{bm}$	2500 <sup>d</sup> V
DC Grid-No.2 (Screen-Grid) Voltage . . . . .	$E_c$	300 V
Peak Negative-Pulse Grid-No.1 (Control-Grid) Voltage. . . . .	$e_{cm}$	250 V
Peak Cathode Current . . . . .	$i_{km}$	260 mA
Average Cathode Current. . . . .	$I_k(av)$	75 mA
Plate Dissipation <sup>e</sup> . . . . .	$P_b$	14 W
Grid-No.2 Input <sup>e</sup> . . . . .	$P_c$	2.75 W
Envelope Temperature . . . . .	$T_E$	210 °C


## MAXIMUM CIRCUIT VALUES

Grid-Circuit Resistance	$R_g(ckt)$	
For fixed-bias operation . . . . .		1 M $\Omega$
For grid-resistor-bias operation . . . . .		2.2 M $\Omega$




- a Triode connection.
- b This value can be measured by a method involving a recurrent wave form such that the plate dissipation and grid-No.2 input will be kept within ratings in order to prevent damage to the tube.
- c This rating is applicable where the duration of the voltage pulse does not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycles is 2.5 milliseconds.
- d Absolute Maximum value.
- e An adequate bias resistor or other means is required to protect the tube in the absence of excitation.

**DIMENSIONAL OUTLINE**  
**Top Exhaust (JEDEC No. 12-65)**

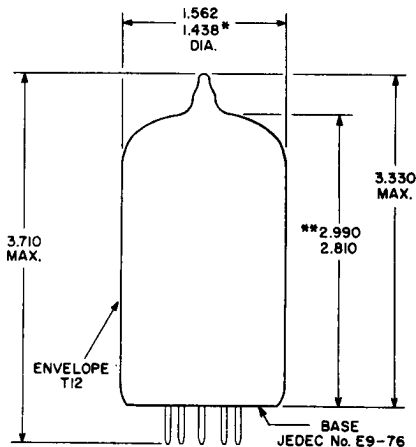

92CS-13502A

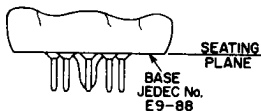

92CS-11127R3B

DIMENSIONS IN INCHES


*Bottom-exhaust version has the same dimensions for maximum overall length and seated length as the top-exhaust outline shown.*

- \* Applies to the minimum diameter except in the area of the seal.
- \*\* Measured from the base seat to bulb-top line as determined by arcing gauge of 0.600" I.D.



# Typical Characteristics

Triode Unit

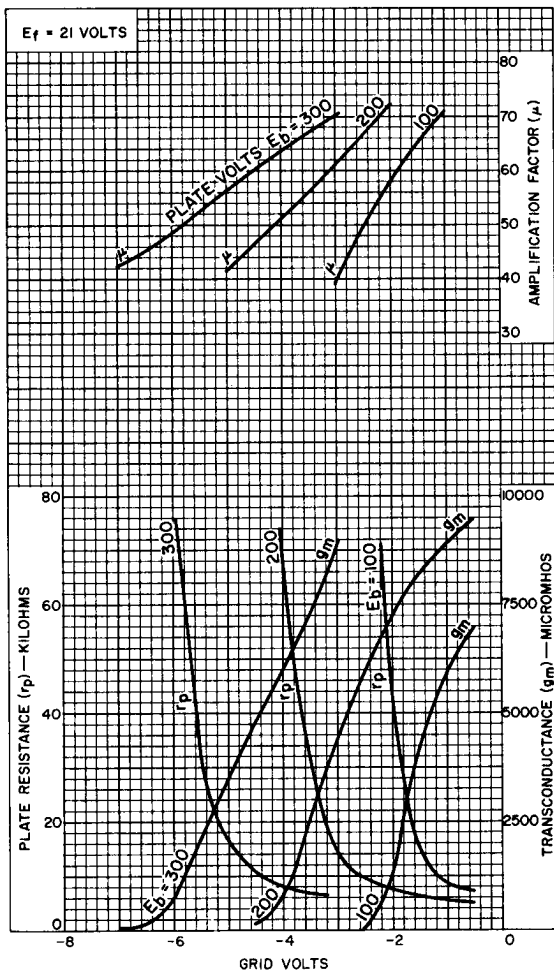


92CM-13506



## Typical Plate Characteristics


Triode Unit

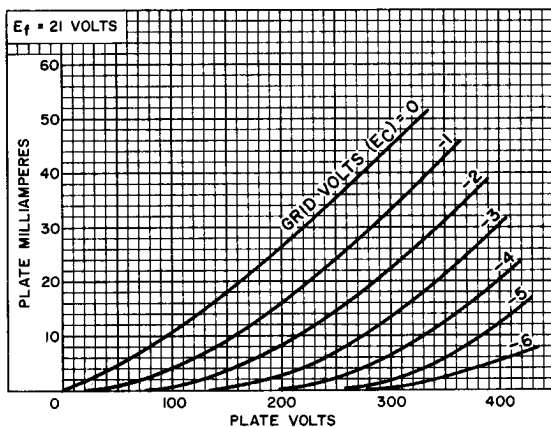

92CS-13508

## Typical Characteristics

Beam Power Unit

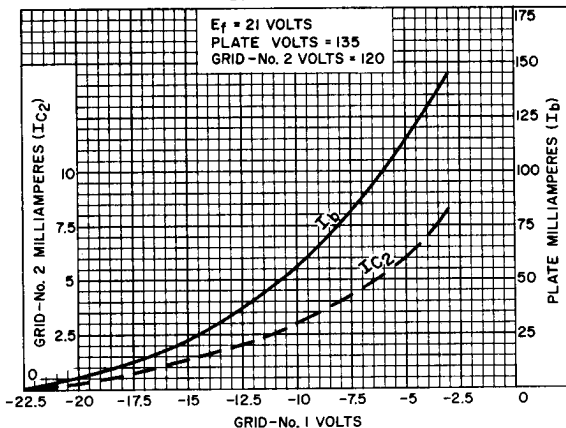


92CS-13509



## Typical Characteristics

Beam Power Unit

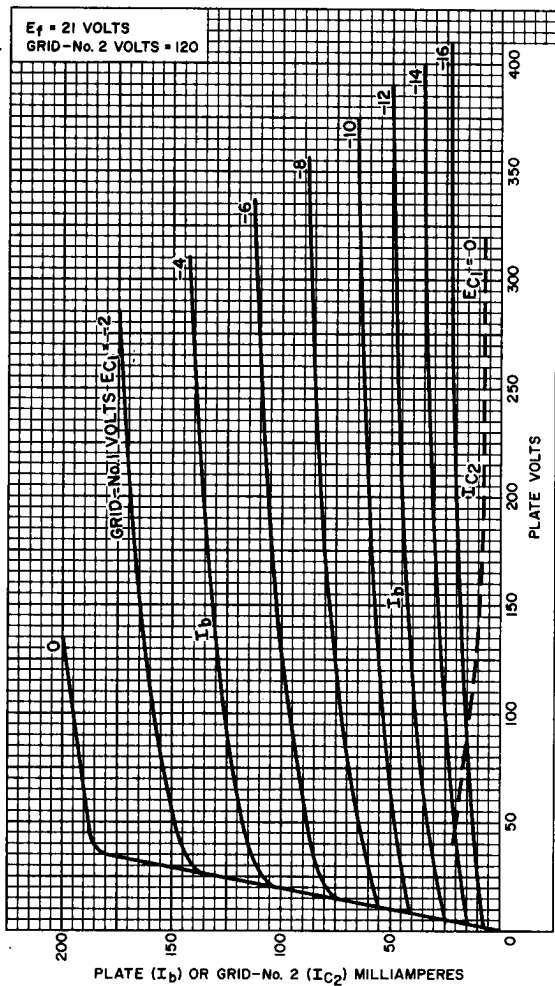

92CM-13507

