

MECHANICAL DATA

Bulb	T-5½
Base	Miniature Button 7-Pin
Basing	6BG
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	12.6 Volts
Heater Current	150 Ma

DIRECT INTERELECTRODE CAPACITANCES

	Shielded ¹	Unshielded
Grid to Plate	3.4	3.4 μmf
Input	2.6	2.4 μmf
Output	3.2	0.9 μmf

RATINGS (Design Center Values)

Plate Voltage	300 Volts	Max.
Plate Dissipation	2.5 Watts	Max.
Heater-Cathode Voltage	90 Volts	Max.

CHARACTERISTICS AND TYPICAL OPERATION



Plate Voltage	90	250 Volts
Grid Voltage	0	-8 Volts
Plate Current	10	9 Ma
Transconductance	3000	2600 μmhos
Plate Resistance	6700	7700 Ohms
Amplification Factor	20	20
Grid Voltage (approx.) For $I_b = 10 \mu\text{a}$	-7	-18 Volts

NOTE:

1. With shield No. 316 connected to cathode.

QUICK REFERENCE DATA

The Sylvania Type 12G4 is a miniature, general purpose, medium mu triode. Except for heater voltage, the type 12G4 is similar to one section of a type 6SN7GT.

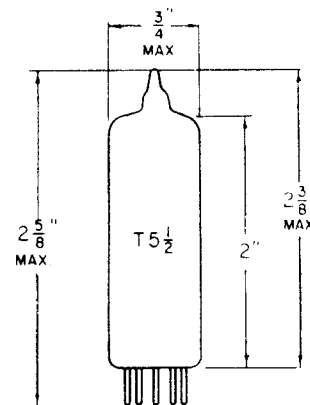


SYLVANIA ELECTRIC PRODUCTS INC.
RADIO TUBE DIVISION


Prepared and Released By The TECHNICAL PUBLICATIONS SECTION EMPORIUM, PENNSYLVANIA

JANUARY 1954

AVERAGE PLATE CHARACTERISTICS

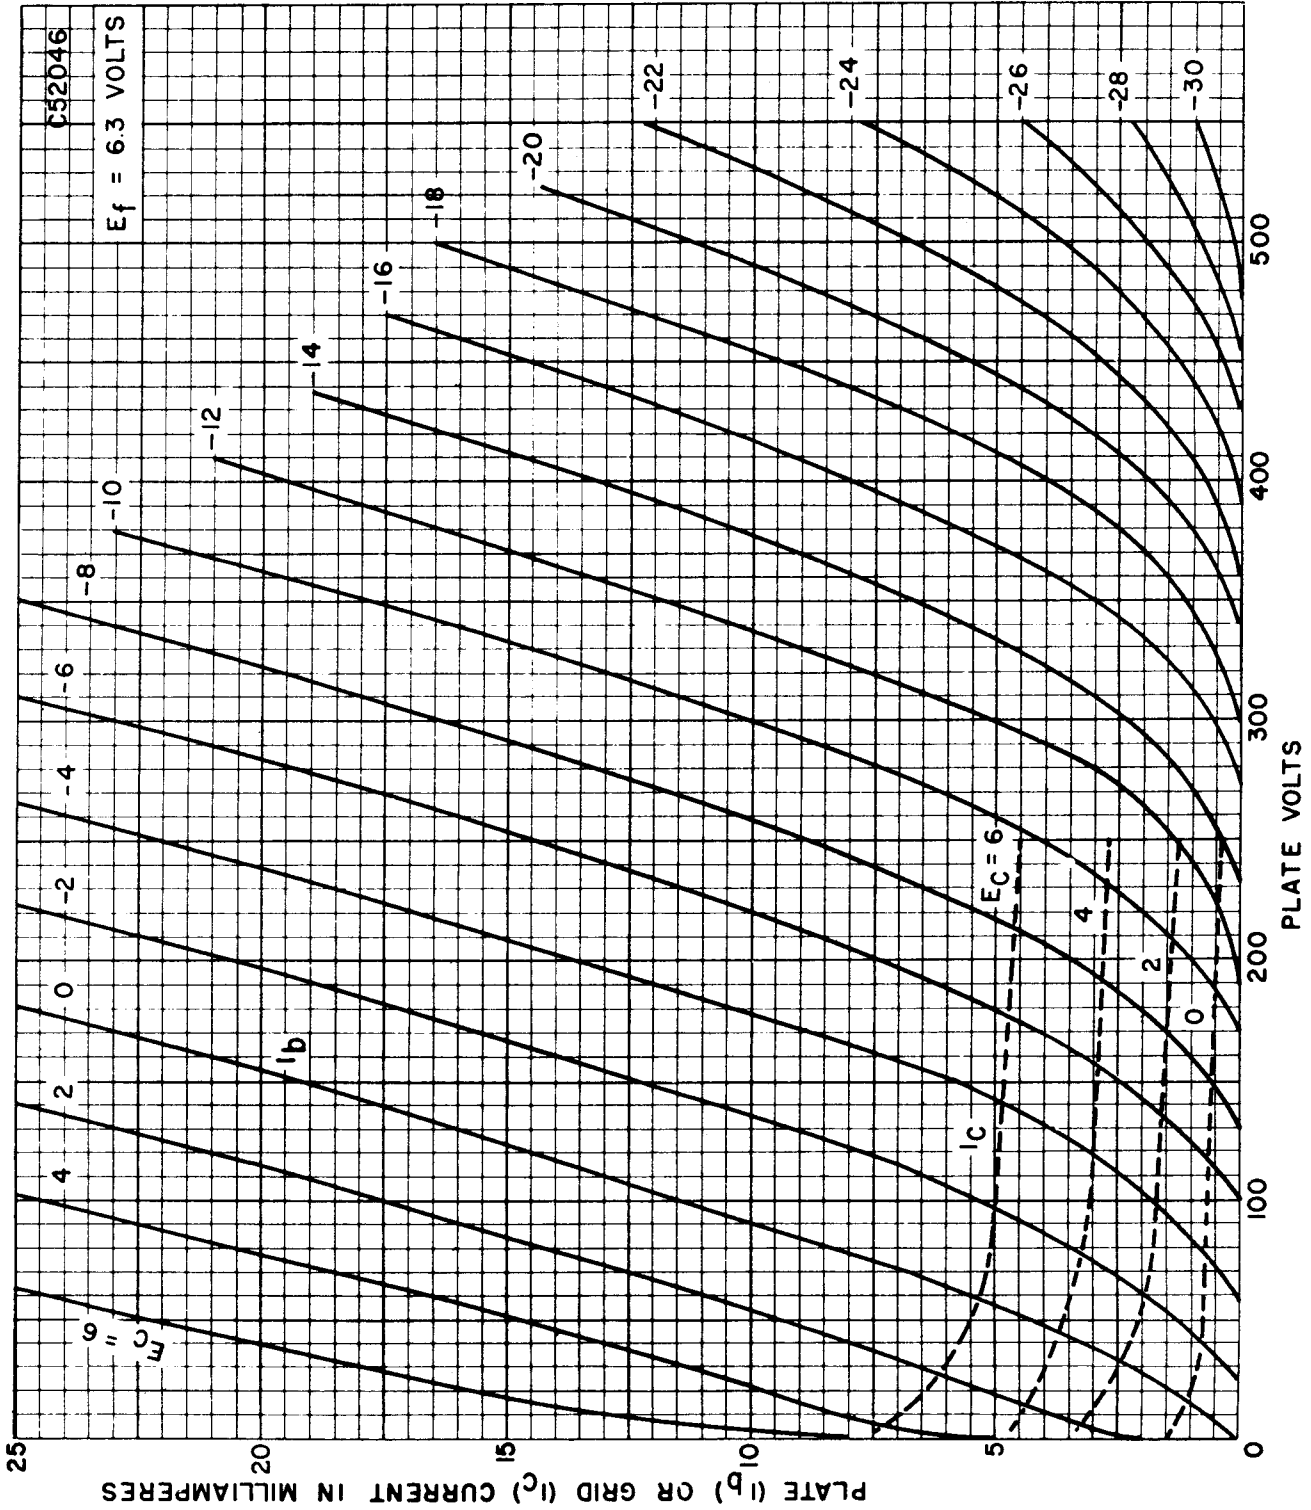

AVERAGE TRANSFER CHARACTERISTICS

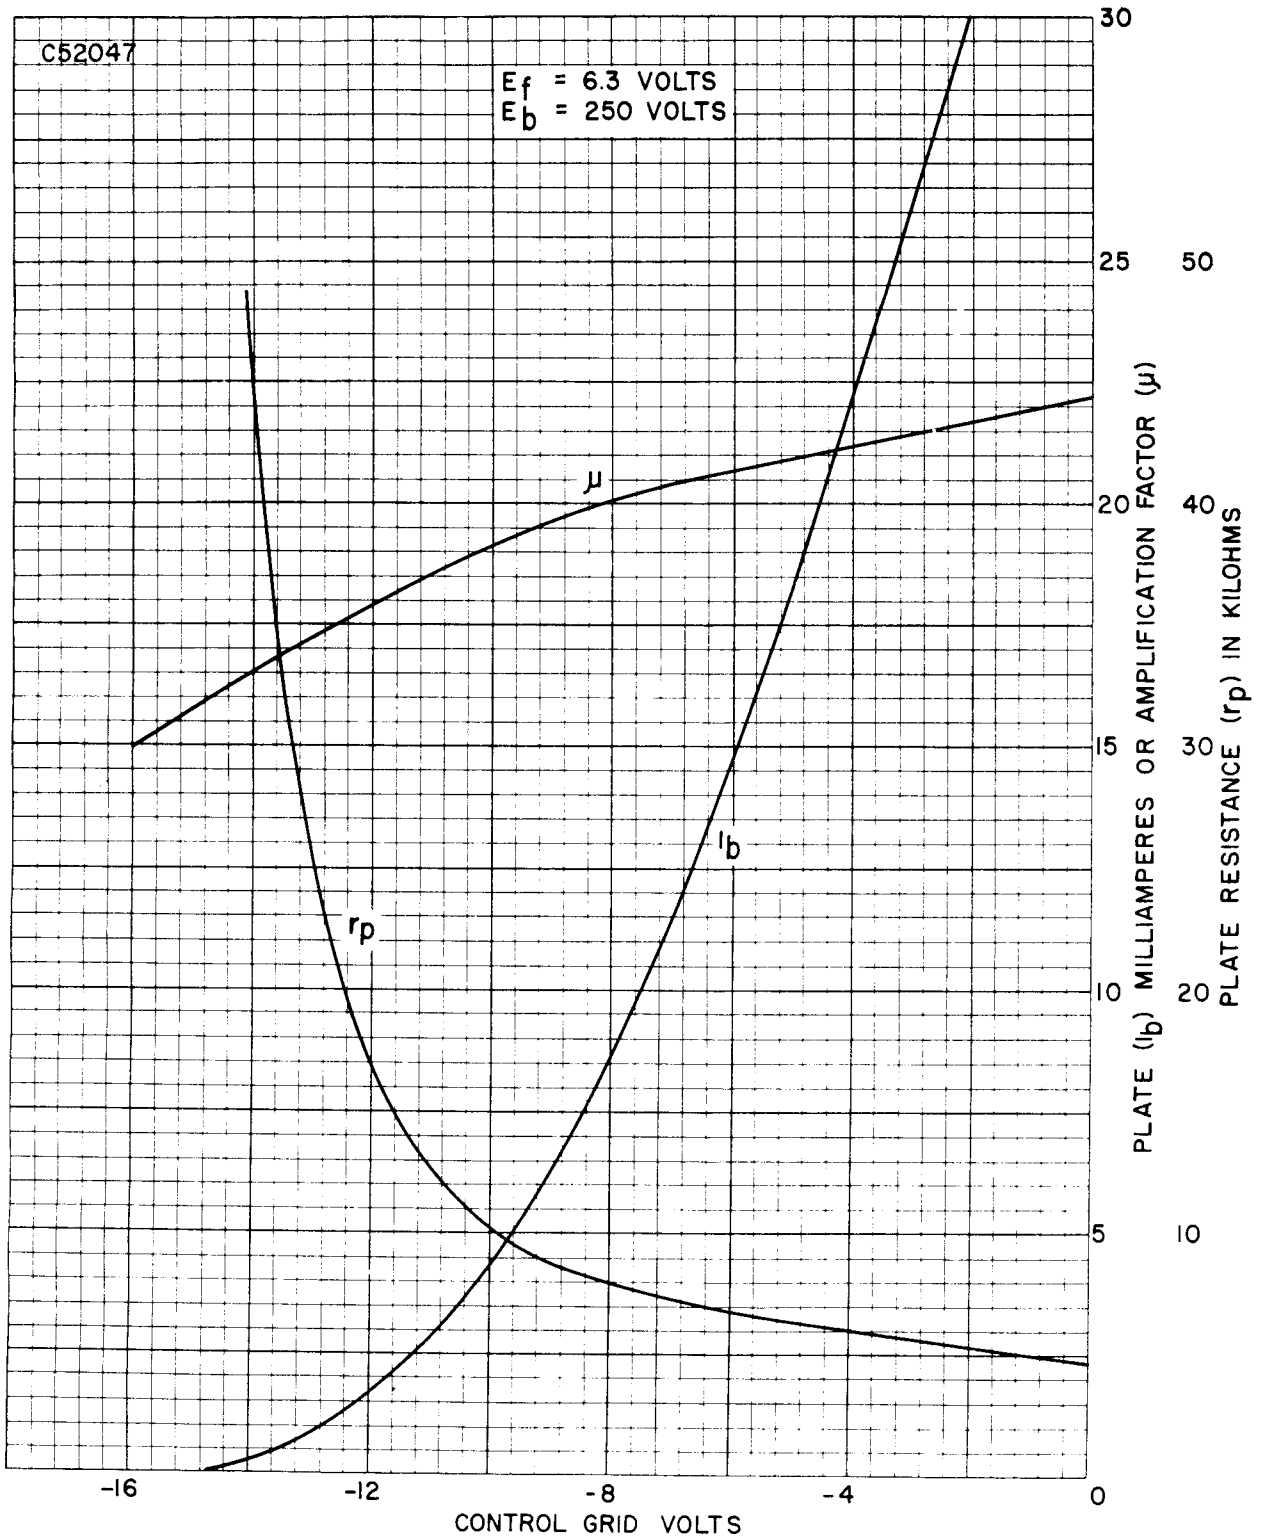

SYLVANIA

12G4

AVERAGE TRANSFER CHARACTERISTICS

