

SHARP-CUTOFF PENTODE TYPE 8426

The 8426 is a 7-pin miniature, sharp-cutoff pentode type designed for service in wide band IF and RF amplifiers. It is operationally similar to type 6AU6 but has a higher transconductance-to-plate-current ratio.



The 8426 features cathode materials and cathode coatings controlled for interface-free long life in industrial applications.

ELECTRICAL

| | |
|-------------------------------------|---------------------|
| Cathode | Coated Unipotential |
| Heater: | |
| Voltage (ac or dc) | 12.6 ± 10% Volts |
| Current | 0.15 Ampere |
| Direct Interelectrode Capacitances: | |
| Pentode Connection: | Unshielded |
| Grid to Plate (Max.) | 0.0030 pf |
| Input | 5.9 pf |
| Output | 5.1 pf |
| Triode Connection (Note 1): | |
| Grid to Plate | 2.5 pf |
| Input | 3.6 pf |
| Output | 1.1 pf |

MECHANICAL

| | |
|-------------------------|------------------------------|
| Bulb | T-5½ |
| Base | Miniature 7-Pin (JEDEC E7-1) |
| Outline | 5-2 |
| Basing | 7BK |
| Mounting Position | Any |

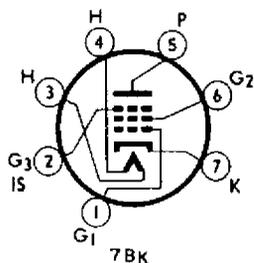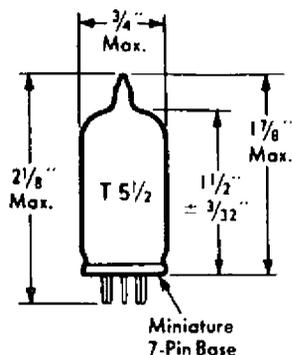

MAXIMUM RATINGS

Design Maximum Values

| | Triode Connection | Pentode Connection | |
|--|-------------------|-------------------------------|------------|
| Plate Voltage | 275 | 330 | max. Volts |
| Grid 2 Supply Voltage | (Note 1) | 330 | max. Volts |
| Grid 2 Voltage | (Note 1) | See Grid 2 Input Rating Chart | |
| Plate Dissipation | 3.5 | 3.5 | max. Watts |
| Grid 2 Dissipation | - | 0.75 | max. Watts |
| Grid 1 Voltage, Positive Bias Value | 0 | 0 | max. Volts |
| Heater-Cathode Voltage: | | | |
| Heater Negative with Respect to Cathode | | | |
| Total DC + Peak | | 200 | max. Volts |
| Heater Positive with Respect to Cathode | | | |
| DC Component | | 100 | max. Volts |
| DC + Peak | | 200 | max. Volts |
| Cathode Interface Impedance after 1000 Hour Life Test (Note 2) | | 5 | max. Ohms |

AMPLIFIER - CLASS A

CHARACTERISTICS AND TYPICAL OPERATION

| | | | | |
|-----------------------------------|----------------------|------|------|--------|
| Plate Voltage | 100 | 250 | 250 | Volts |
| Grid 2 Voltage | 100 | 125 | 150 | Volts |
| Grid 3 Voltage | Connected to Cathode | | | |
| Cathode Resistor | 150 | 100 | 68 | Ohms |
| Transconductance | 4500 | 5500 | 6200 | μmhos |
| Plate Resistance | 0.6 | 1.3 | 1.1 | Megohm |
| Grid 1 Cutoff Bias (Note 3) | -4.1 | -4.9 | -5.8 | Volts |
| Plate Current | 4.8 | 7.4 | 10.5 | Ma. |
| Grid 2 Current | 1.9 | 2.8 | 4.1 | Ma. |

CHARACTERISTICS (Triode Connected)

| | | |
|----------------------------|------|-------|
| Plate Voltage | 250 | Volts |
| Cathode Resistor | 330 | Ohms |
| Amplification Factor | 41 | - |
| Transconductance | 6000 | μmhos |
| Plate Current | 11.2 | Ma. |


NOTES

- Grids 2 and 3 connected to plate.
- Life Test Conditions:

| | |
|------------------------|--------------------------------|
| Filament Volts = 13.0 | Grid 1 Volts = -4.0 |
| Plate Volts = 250 | Grid 3 Volts = 0 |
| Grid 2 Volts = 250 | Cathode ohms = 0 |
| Grid 1 Resistor = 250K | Heater to Cathode Volts = -200 |

Cathode-Interface Impedance Test:
As detailed in ASTM-F300-61T; appendix III
with Filament Volts = 11.4
- For plate current of 10 μa.

from JEDEC release #4321, July 1, 1963

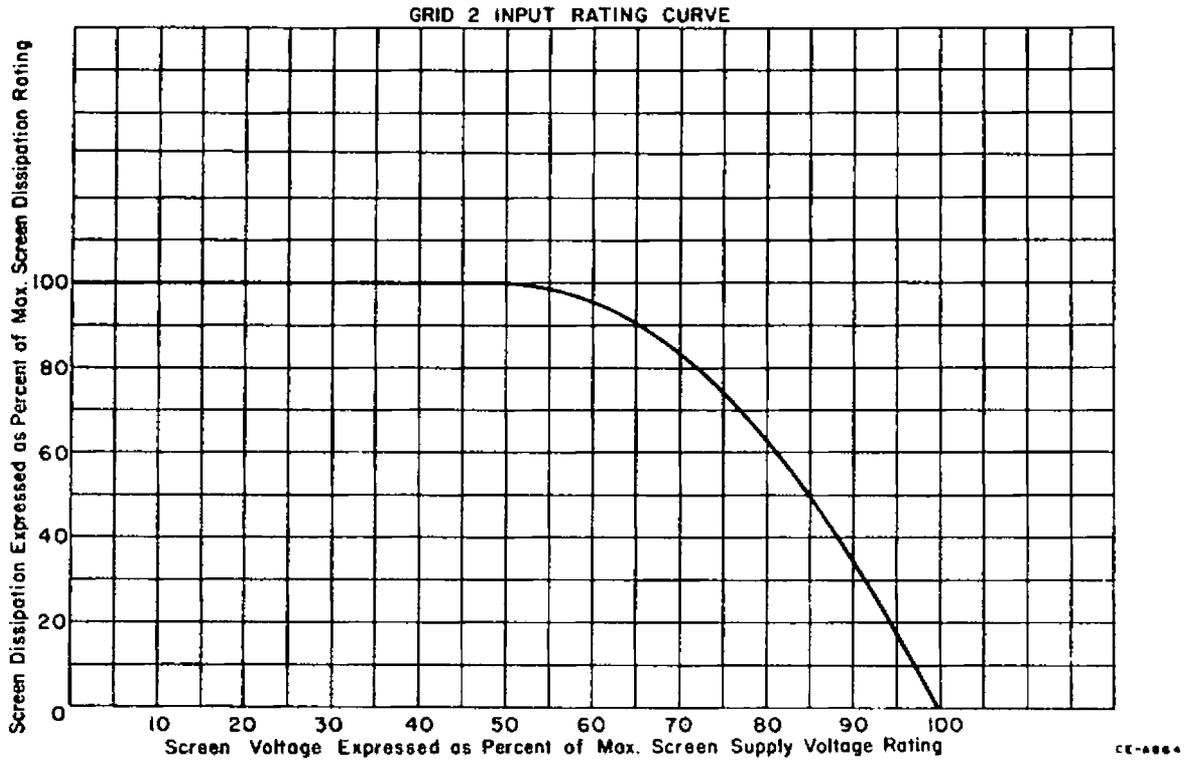

The information contained herein is supplied without assuming responsibility for infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Westinghouse Electric Corporation.
WESTINGHOUSE ELECTRIC CORPORATION, ELECTRONIC TUBE DIVISION, ELMIRA, NEW YORK